

CUSTOMER : \_\_\_\_\_

NO. : MKM-

EDIT :

DATE :

## SPECIFICATION FOR APPROVAL

PRODUCT : 0.56" Dual-Digit 7-Segment Numeric Display

MODEL NO. MD-620D/627D

APPROVAL			REVISION
CHK	CHK	APPD.	
REMARKS			



MIKWANG ELECTRONICS CO., LTD.

RM1401, 60-24, GASAN-DONG, GEUMCHEON-GU, SEOUL, KOREA

TEL : 82-2-2113-7700(Rep.) FAX : 82-2-2113-7707

URL : WWW.LED.CO.KR / E-MAIL : mkled7700@hanmail.net

# MI KWANG ELECTRONICS MD-620D/627D


## 0.56 Inch Dual-Digit 7-Segment Numeric Display

### GENERAL DESCRIPTION

The MD-620D and MD-627D series are high performance epoxy resin molded 2-digit 7-segment LED displays for an application which space is at a premium.

The character height is approximately 0.56-inch(14.1mm) and available in red, green, orange and yellow-green emitting colors. The standard unit is constructed with black face and milky white segment color.

### PACKAGE DIMENSIONS

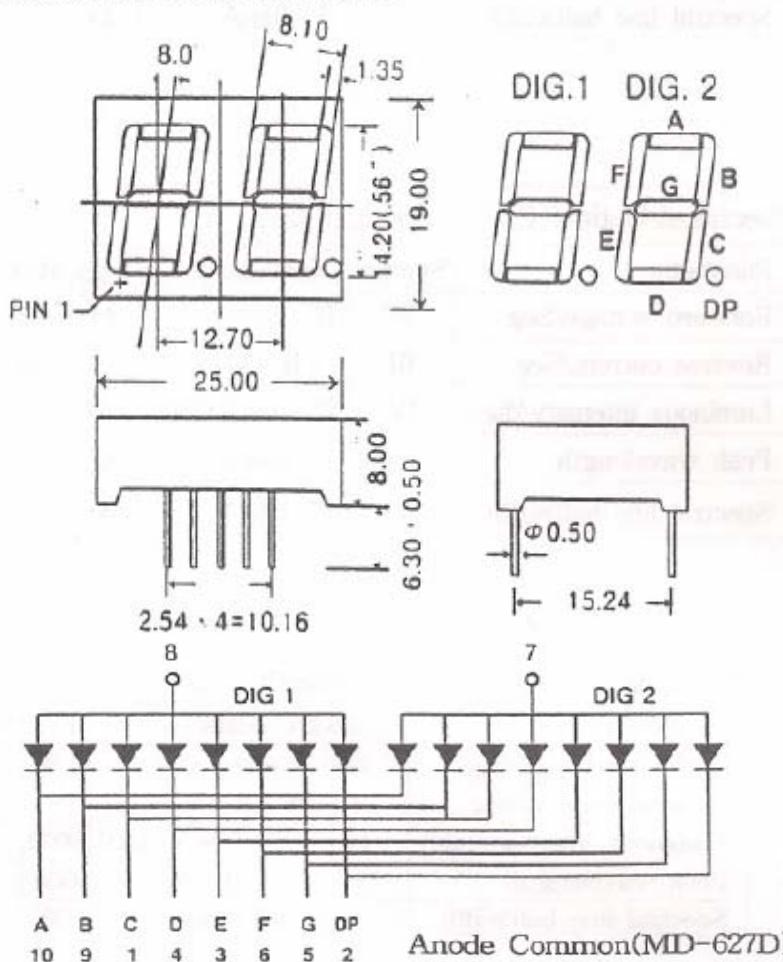

### ACTUAL SIZE



Cathode Common(MD-620D)

All diodes are reversed polarity

## MIKWANG ELECTRONICS CO., LTD.

Rm1401, World Meridian Venture Center, #60-24, Gasan-dong, Geumcheon-gu, Seoul, Korea

TEL +82-2-2113-7700/ FAX +82-2-2113-7707 [www.LED.co.kr](http://www.LED.co.kr)

# MI KWANG ELECTRONICS

# MD-620D/627D

## ◆ Super Red MD-SR620D/SR627D(A1GaAs/GaAs)

### Absolute Maximum Ratings(Ta=25°C)

Power dissipation/total	640	mW
Power dissipation/seg	40	mW
Forward current	20	mA
Peak forward current	60	mA
Reverse voltage	5	V
Operating temperature	-25~+85	°C
Storage temperature	-55~+100	°C

### Electrical/Optical Characteristics(Ta=25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward voltage/seg	Vf	If=10mA	-	1.8	2.0	V
Reverse current/seg	Ir	Vr=5V	-	-	10	μA
Luminous intensity/digit	Iv	If=10mA	600	1300	-	μcd
Peak wave length	λ p	If=10mA	-	660	-	nm
Spectral line half width	△ λ	If=10mA	-	20	-	nm

## ◆ Green MD-UG620D/UG627D(GaP)

### Absolute Maximum Ratings(Ta=25°C)

Power dissipation/total	768	mW
Power dissipation/seg	48	mW
Forward current	20	mA
Peak forward current	60	mA
Reverse voltage	5	V
Operating temperature	-25~+85	°C
Storage temperature	-55~+100	°C

### Electrical/Optical Characteristics(Ta=25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward voltage/seg	Vf	If=10mA	-	2.2	2.4	V
Reverse current/seg	Ir	Vr=5V	-	-	10	μA
Luminous intensity/digit	Iv	If=10mA	600	1300	-	μcd
Peak wave length	λ p	If=10mA	-	570	-	nm
Spectral line half width	△ λ	If=10mA	-	30	-	nm

◆ Pulse Width – 1ms  
Duty Cycle – 1/5