

CUSTOMER : _____

NO. : MKM-

EDIT :

DATE :

SPECIFICATION FOR APPROVAL

PRODUCT : 2.28" \varnothing 5 8 \times 8 Dot Matrix LED Display

MODEL NO. MDM-5880/5887

APPROVAL			REVISION
CHK	CHK	APPD.	
REMARKS			



MIKWANG ELECTRONICS CO., LTD.

RM1401, 60-24, GASAN-DONG, GEUMCHEON-GU, SEOUL, KOREA

TEL : 82-2-2113-7700(Rep.) FAX : 82-2-2113-7707

URL : WWW.LED.CO.KR / E-MAIL : mkled7700@hanmail.net



MIKWANG ELECTRONICS MDM-5880/5887

2.28" \varnothing 5 8 \times 8 Dot Matrix LED Display

GENERAL DESCRIPTION

The MDM-5880 and the MDM-5887 are an epoxy molded 2.28-inch(58.0mm) height, 5-pie diameter and 8 \times 8 dot matrix LED displays. The standard units are available in red, orange and yellow-green emitting colors.

PACKAGE DIMENSIONS

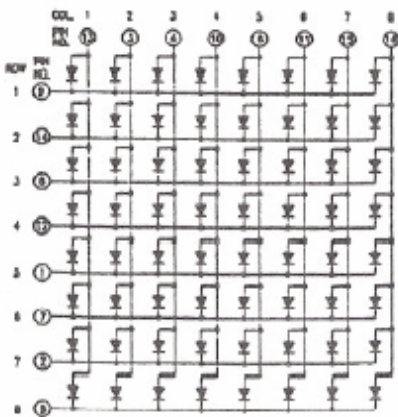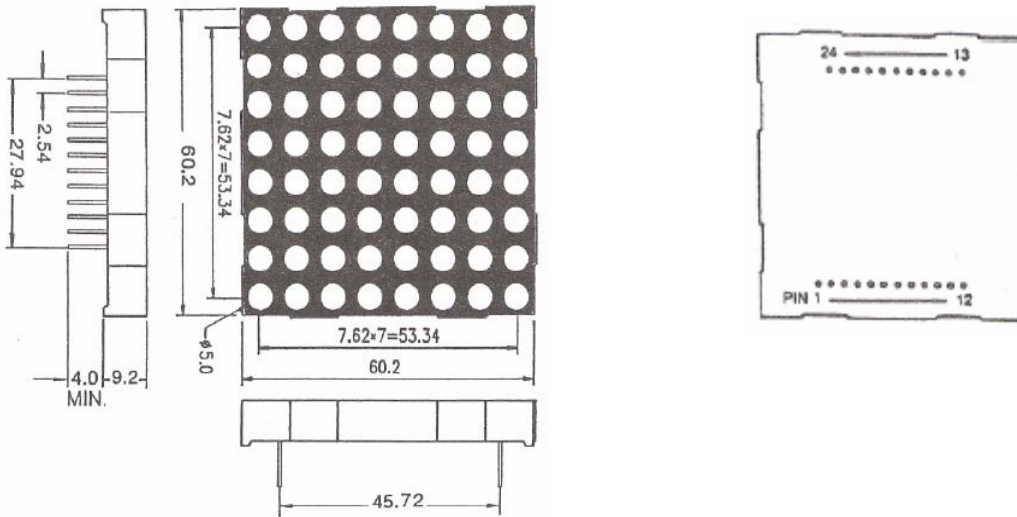

MDM-5880
(Cathode Row)



MDM-5887
(Cathode Column)

MIKWANG ELECTRONICS CO., LTD.

Rm1401, World Meridian Venture Center, #60-24, Gasan-dong, Geumcheon-gu, Seoul, Korea
 TEL +82-2-2113-7700/ FAX +82-2-2113-7707 www.LED.co.kr

MIKWANG ELECTRONICS MDM-5880/5887

◆ Red MDM-UR5880/UR5887 (AlGaAs/GaAs)

Absolute Maximum Ratings(Ta=25℃)

Power dissipation/total	2560	mW
Power dissipation/seg	40	mW
Forward current	20	mA
Peak forward current	60	mA
Reverse voltage	5	V
Operating temperature	-25~+85	℃
Storage temperature	-55~+100	℃

Electrical/Optical Characteristics(Ta=25℃)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward voltage/seg	V _f	I _f =10mA	-	1.8	2.0	V
Reverse current/seg	I _r	V _r =5V	-	-	10	μA
Luminous intensity/digit	I _v	I _f =10mA	1300	2500	-	μcd
Peak wave length	λ _p	I _f =10mA	-	660	-	nm
Spectral line half width	Δλ	I _f =10mA	-	20	-	nm

◆ Green MDM-UG5880/UR5887 (GaP)

Absolute Maximum Ratings(Ta=25℃)

Power dissipation/total	3072	mW
Power dissipation/seg	48	mW
Forward current	20	mA
Peak forward current	60	mA
Reverse voltage	5	V
Operating temperature	-25~+85	℃
Storage temperature	-55~+100	℃

Electrical/Optical Characteristics(Ta=25℃)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward voltage/seg	V _f	I _f =10mA	-	2.2	2.4	V
Reverse current/seg	I _r	V _r =5V	-	-	10	μA
Luminous intensity/digit	I _v	I _f =10mA	600	1200	-	μcd
Peak wave length	λ _p	I _f =10mA	-	570	-	nm
Spectral line half width	Δλ	I _f =10mA	-	30	-	nm

- ◆ Pulse Width - 1ms
- Duty Cycle - 1/5